


U.S. Spinnaker Fabrics

30/20 • Stabilkote 4 • 1.5oz Ripstop • Force 9

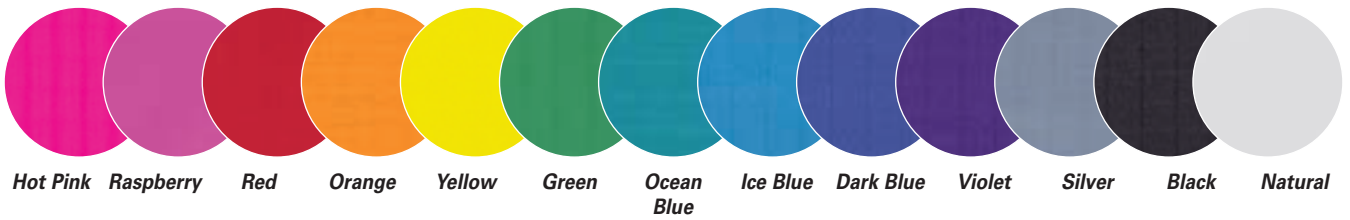

Specifications - U.S. Spinnaker Fabrics

Style	Width: mm/in		Direction	Warp x Fill: Denier		Weight: gsm/smoz		Lab 20lb	Tear Strength: lb
30/20	1370	54	Warp	30		34	0.80	8.5	2.8
			Fill	30				41	3
			Bias					14 (2 Ply)	
Stabilkote 4	1370	54	Warp	30		44	1.02	7	3.9
			Fill	40				18	4.5
			Bias					9 (2 Ply)	
1.5oz Ripstop	1370	54	Warp	70		77	1.80	4	4
			Fill	70				6.5	5
			Bias					4.5 (2 Ply)	
Force 9	1370	54	Warp	150		116	2.70	3	5
			Fill	150				6	4.5
			Bias					4 (2 Ply)	

Note: Performance data and weights are genuine averages based on a series of production lots.

Applications - U.S. Spinnaker Fabrics

Boat Length		Cruising Chute	VMG	Light Ap	Medium Ap	Heavy Runner	Heavy Reacher
25 - 35	Cruise	Stabilkote 4	-	30/20	Stabilkote 4	Stabilkote 4	Stabilkote 4
	Club Race	-	30/20	30/20	Stabilkote 4	Stabilkote 4	Stabilkote 4
	Grand Prix	-	30/20	30/20	Stabilkote 4	Stabilkote 4	Stabilkote 4
35 - 45	Cruise	Stabilkote 4	-	Stabilkote 4	Stabilkote 4	1.5 Ripstop	1.5 Ripstop
	Club Race	-	30/20	30/20	Stabilkote 4	Stabilkote 4	Stabilkote 4
	Grand Prix	-	30/20	30/20	Stabilkote 4	Stabilkote 4	Stabilkote 4
45 - 55	Cruise	1.5 Ripstop	-	Stabilkote 4	1.5 Ripstop	1.5 Ripstop	1.5 Ripstop
	Club Race	-	30/20	30/20	Stabilkote 4	1.5 Ripstop	1.5 Ripstop
	Grand Prix	-	30/20	30/20	Stabilkote 4	Stabilkote 4	1.5 Ripstop
55 - 65	Cruise	1.5 Ripstop	-	Stabilkote 4	1.5 Ripstop	1.5 Ripstop	1.5 Ripstop
	Club Race	-	30/20	30/20	Stabilkote 4	1.5 Ripstop	1.5 Ripstop
	Grand Prix	-	30/20	30/20	Stabilkote 4	1.5 Ripstop	1.5 Ripstop
65 - 75	Cruise	Force 9	-	Stabilkote 4	1.5 Ripstop	1.5 Ripstop	Force 9
	Club Race	-	30/20	30/20	Stabilkote 4	1.5 Ripstop	Force 9
	Grand Prix	-	30/20	30/20	Stabilkote 4	1.5 Ripstop	1.5 Ripstop